



UCG080A

Features

- Produces clear, long-lasting gourmet cubes.
- Space-saving 18¼ in. (467 mm) wide under-counter design.
- Produces up to 95 lbs. (43 kg) of ice per day.
- Constructed from sturdy, corrosion-resistant stainless steel and fingerprint-proof plastic.
- Ideal for any under-counter or bar application.
- Contemporary, elegant design.
- Environmentally friendly R290A refrigerant.

Space-Saving Solutions

- Front air discharge design for compact spaces.
- Low profile top saves counter space.
- Fits under compliant counters.
- Stores up to 33 lbs. (15 kg) of ice.
- Easy front access to ice.
- Removable Air Filter.

Options & Accessories

| Ice Machine Model | WATER FILTERS | | |
|-------------------|---------------|-------------|---------------|
| | Manifold | | Inline |
| | System | Replacement | System |
| UCG080A | IFQ1-S | IOMQ-S | IF14C / IF18C |

Ice Maker Warranty

Every UCG Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Three years parts and labor.


Ice Form



GOURMET ICE




GOURMET ICE DIMENSIONS

| | |
|----------|---------------------|
| Height | 1.2" (30.5 mm) |
| Diameter | 1.35" (34.25 mm) |

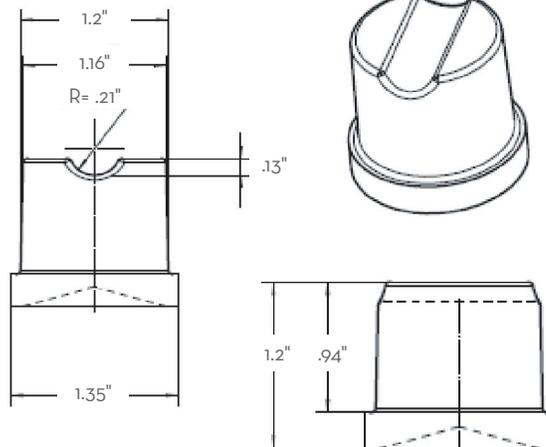



UCG080A GOURMET SERIES UNDERCOUNTER

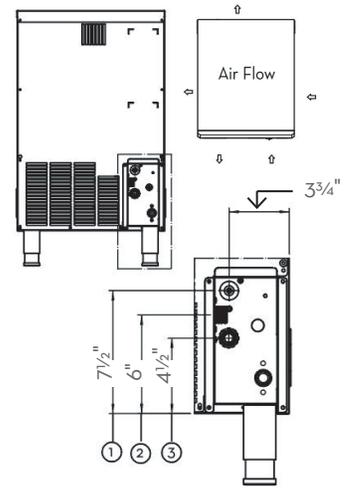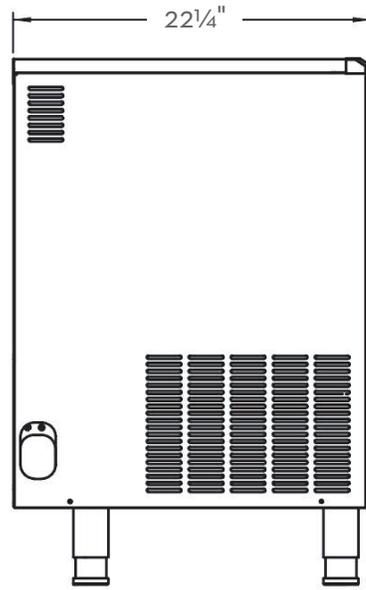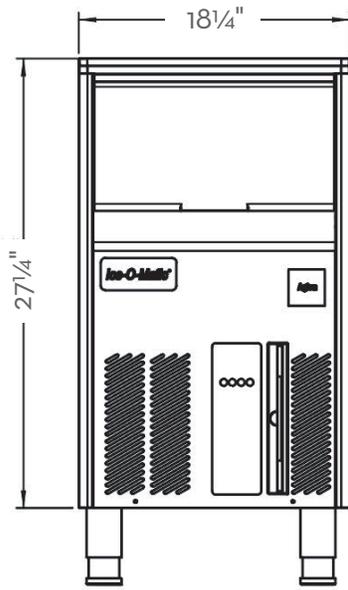

Legs Included

Extends from 5" to 6 3/4"



UCG SHORT LEG OPTION

Extends from 2 1/8" to 2 1/2"



Part No.
1011411-87

- 1 - Power Cord
- 2 - 3/4" Water Inlet
- 3 - 25/32" Water Drain

Dimensions

| MODELS | LEGS INCLUDED | UCG SHORT LEG OPTION |
|-----------------|---------------------------|--|
| W x D x H (in.) | *18 1/4 x 22 1/4 x 27 1/4 | 18 1/4 x 22 1/4 x 29 3/8 (min) 18 1/4 x 22 1/4 x 29 3/4 (max) COST OPTION |
| W x D x H (mm) | *464 x 565 x 692 | 464 x 565 x 746 (min) 464 x 565 x 756 (max) COST OPTION |

* Dimensions do not account for Included or UCG Short Leg Option.

Operating Requirements

| | MINIMUM | |
|-------------------------|----------------|----------------|
| | 60 Hz | |
| Ambient Temp. Range Air | 50°F (10°C) | 109°F (43°C) |
| Water Temp. | 41°F (5°C) | 100°F (38°C) |
| Water Pressure | 14 PSI (1 BAR) | 70 PSI (5 BAR) |
| Electrical Voltage | 115V/60Hz/1ph | |

Specifications

| Model Number | Cond. Unit | Ice Production per 24hrs | | Storage Capacity lbs (kg) | Water Consumption gal/hr | kWH Used per 100 lbs (45 kg) of ice @ 90°F (32°C) air/ 70°F (21°C) water | Amp Max @ (32°C) air/ (32°C) water | Voltage Characteristics |
|--------------|------------|---|---|---------------------------|--------------------------|--|------------------------------------|-------------------------|
| | | 70°F (21°C) air/ 50°F (10°C) water lbs (kg) | 90°F (32°C) air/ 70°F (21°C) water lbs (kg) | | | | | |
| UCG080A | Air | 95 (43) | 71.5 (32.5) | 33 (15) | 1.03 | 9.7 | 3.9 | 115/60/1 |

NOTES:

Approx. Shipping Weight lbs (kg): 90.4 (41)

Refrigerant Type: R290A

All specifications and performance data are subject to normal manufacturing variances.

Ice-O-Matic reserves the right to change the specifications at any time without obligation. Certifications may vary depending on country of origin.